



Safety Track

ST-1300

User and Installation Guide




A detailed guide on how to use and install the device

Specifications

Waterproof	IP67
Dimensions	85mm*185mm*31mm(3.35" *7.28" *1.22")
Weight	370g(13oz)
Battery	Rechargeable Li-Polymer 9600 mAh/ 3.6V
Standby Time (Without solar charging, 2 hours)	10 minutes reporting: 320Days 5 minutes reporting: 170Days
Charging & Data Communication	Magnetic USB cable (Recommend using 5V 1A adaptor, 20 hours)
Operating Temperature	-25°C ~ +70°C (-13°F ~ 158°F)

LED Indicators

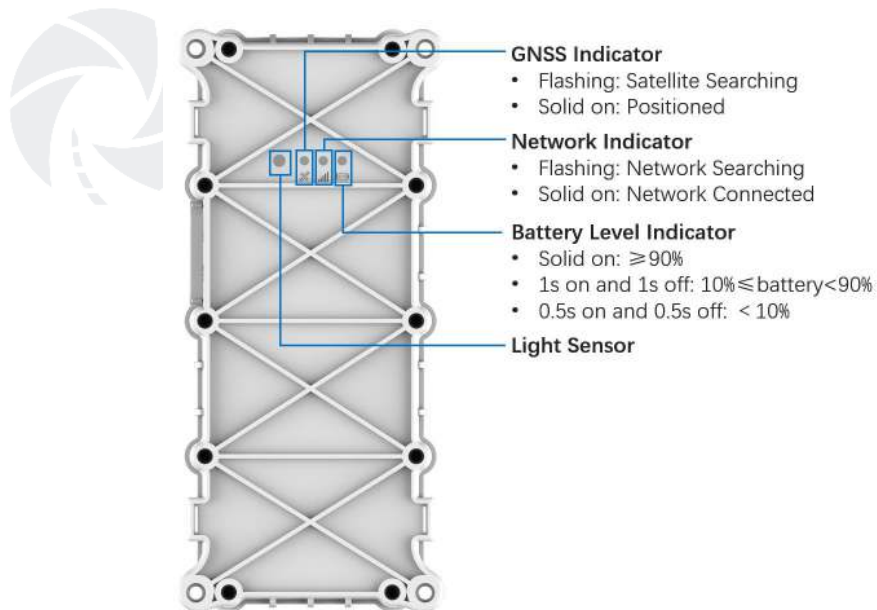

Accessories



- USB Cable



Troubleshooting

- Tracker Shows Offline
 - Check the external power voltage to see whether the tracker is disconnected from external power.
 - Check whether the vehicle entered network blind area.
- Unable to Locate
 - Is the top side facing upwards without shielded by metallic things during the installation?
 - Does the vehicle enter an area with no satellite coverage?
- Location Drift
 - In an area with poor GNSS signal (like the areas with lots of high buildings), location drift may happen. When move to open area, the drift will no longer exists.

Optional Accessories

Temperature Sensor	BLE5.0 Wireless Temperature & Humidity Sensor	
Door Sensor	BLE5.0 Wireless Door & Temperature Sensor	
PTO Sensor	BLE5.0 Wireless Relay	